



Available in one and twin fuse versions, flexible configurations, with a full range of accessories to suit all cable types.

Features:

time and money.

- Easy to install
- Simple fuse carrier removal
- Manufactured with longevity in mind
- Robust terminal blocks to ensure secure cable retention
- Compatible with armoured and non-armoured cables

Specification:

- Designed, tested, and manufactured to BS7654
- IP43
- Double pole isolation as standard
- For cables up to 25mm²
- Moulded in high performance thermoplastic

Additional Information:

- One or two fuse versions
- Large range of cable entry plates and extension troughs
- 3 phase versions available



Example of internal view of cut out



Internal view of a single fuse carrier fitted with Lawson LST fuse

Titan 2: (NT09-TT-NG26)

THM0020868

Titan double pole, Twin fuse cut out designed for outdoor Emergency Lighting applications.

The unit provides two separate Live fuseways; one for the switched/unswitched lighting circuit, and a second for the unswitched battery charging supply.


Also suitable for other applications with separate Live feeds, e.g. 2 switched circuits to one luminaire.


IMPORTANT: Suitable for Single Phase installations only.

Supplied complete with Earth block and brass glands plate with 2 x 25 LM25 tubes.

Product Information:	
Supply	220-254V 50-60Hz
Suggested Cable Size Range	up to 16mm²
Fuse Type	BS88 LST (available separately)
Terminal blocks suitable for	Circular conductors up to 25mm ²

Compliance and Approvals:	
Ingress Protection (IP) rating	IP43
Warranty	2 years
British Standard	BS7654



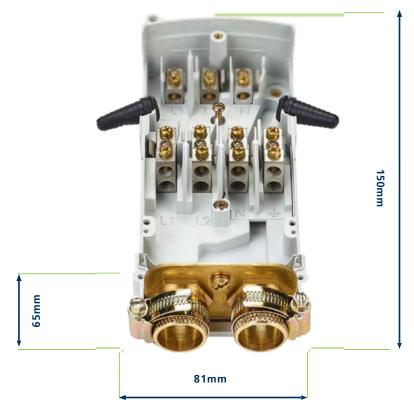



For orders, please email:

orderline@lucyzodion.com

For quotes, please email:

quotes@lucyzodion.com

Alternatively, you can call our customer sales team on:

+ 44 (0) 1422 317 217







